




SCREENS AND SPARE PARTS

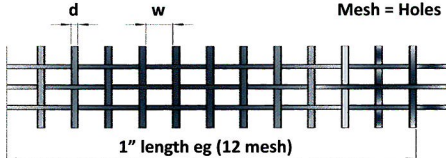

SCREEN MESH & OPENINGS

TENSIL BOLTING CLOTH (TBC)				MARKET GRADE (MG)			
Opening In Microns	% Open Area	Wire Dia. mm	Mesh Count	Opening In Microns	% Open Area	Wire Dia. mm	Mesh Count
				11.099	76.4	1.600	2
				10.668	70.6	2.032	
				7087	70.1	1.371	3
				5138	65.9	1.206	4
				4750	56.0	1.600	4
				4038	63.2	1.041	5
				3347	62.7	0.883	6
				2743	57.2	0.889	7
				2448	60.2	0.726	8
				1885	56.3	0.655	10
				1854	64.5	0.457	11
				1532	51.8	0.584	12
				1295	51.0	0.518	14
				1130	50.7	0.460	16
1359	73.3	0.228	16				
1158	70.2	0.228	18				
1041	67.2	0.228	20				
965	69.7	0.190	22	981	48.3	0.439	18
868	67.2	0.190	24	876	46.2	0.411	20
787	64.8	0.190	26				
716	62.4	0.190	28	704	44.2	0.355	24
681	64.8	0.165	30				
630	62.7	0.165	32				
582	60.7	0.165	34				
541	58.7	0.165	36	516	37.1	0.325	30
503	56.7	0.165	38				
470	54.8	0.165	40				
465	59.1	0.139	42				
437	57.4	0.139	44	447	37.9	0.299	35
411	55.8	0.139	46				
389	54.2	0.139	48	381	36.0	0.264	40
368	52.6	0.139	50	 Mesh = Holes per inch 1" length eg (12 mesh)			
348	51.0	0.139	52				
330	49.4	0.139	54				
323	54.6	0.114	58				
310	53.3	0.114	60				
295	51.7	0.114	62				
282	50.7	0.114	64	279	30.3	0.229	50
269	54.9	0.094	70				
259	53.8	0.094	72				
249	52.7	0.094	74				
241	51.7	0.094	76				
231	50.6	0.094	78	233	30.5	0.190	60
224	49.6	0.094	80				
213	49.8	0.089	84				
200	47.9	0.089	88				
193	47.8	0.089	90				
180	45.0	0.089	94	178	31.4	0.14	80
165	46.9	0.076	105				
147	47.3	0.063	120	140	30.3	0.114	100
119	46.4	0.055	145	114	30.5	0.094	120
106	47.1	0.048	165	104	37.9	0.066	150
86	46.2	0.040	200	88	35.1	0.061	170
74	46.0	0.035	230	74	33.6	0.053	200
All screen listed are square mesh. Commonly available in 304/316 stainless steel. Some meshes are also available in polyester or nylon, anti static or magnetic stainless steel.				61	36.0	0.040	250
				53	32.2	0.040	270
				43	30.8	0.035	325
				38	36.0	0.025	400
				25	25.0	0.025	500
				20	25.0	0.020	635