




AMKCO VIBRATORY GRINDING MILL

HIGH PRODUCTIVITY

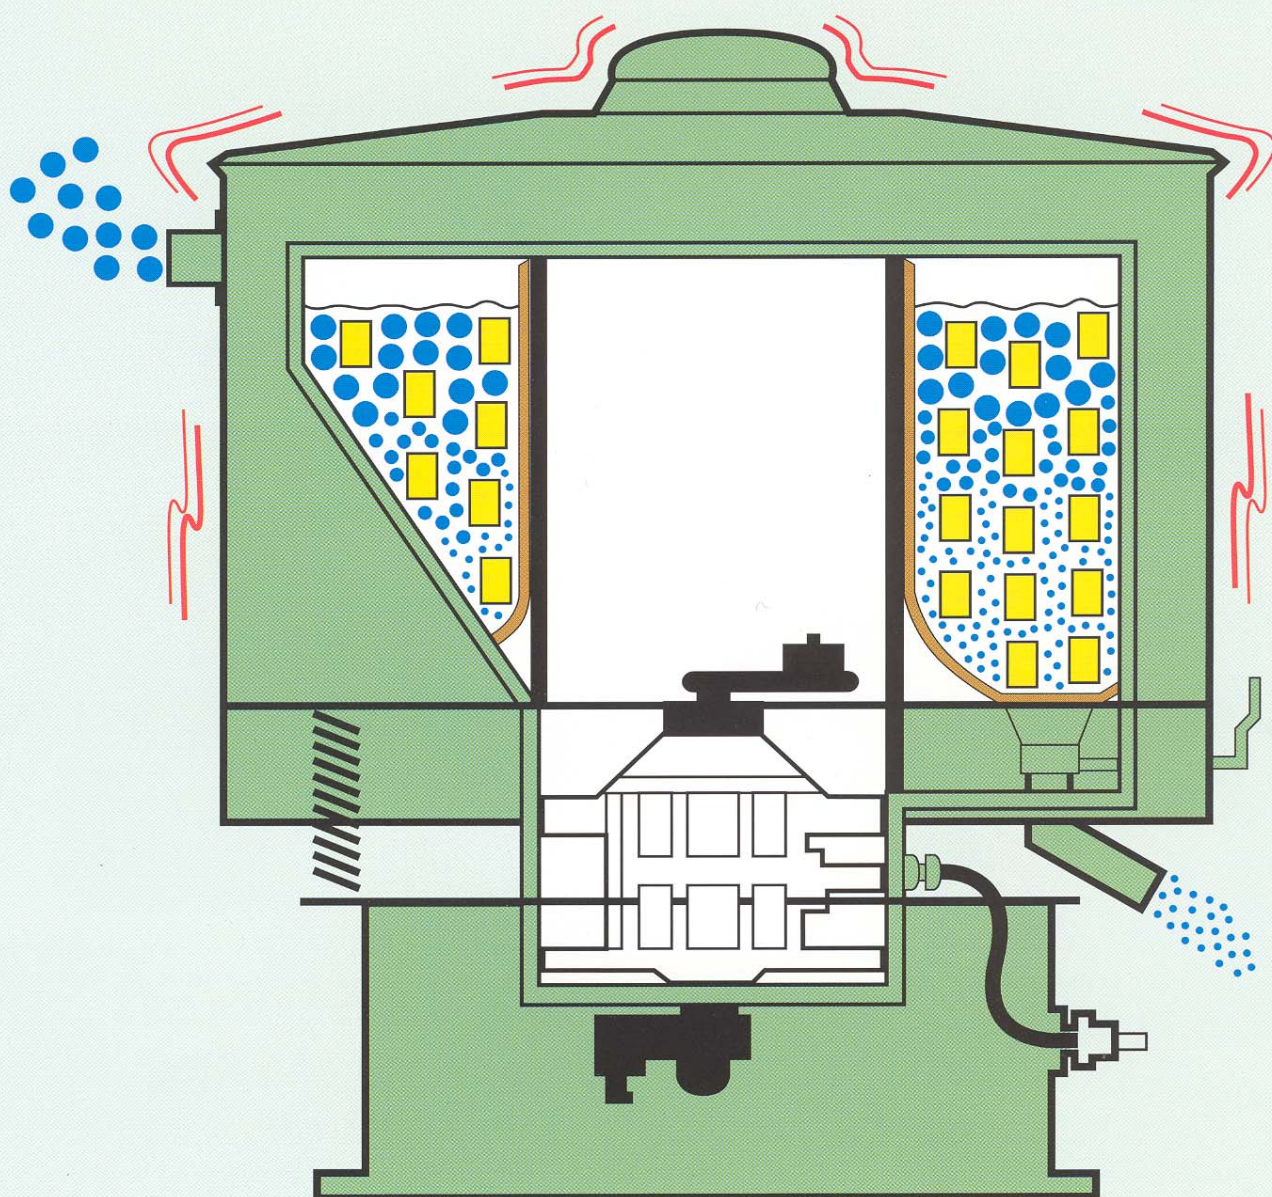


HOW THE VIBRATORY MILL WORKS

The Mill consists of a grinding chamber and vibrating motor.

The grinding chamber is a vertical cylinder filled with small pieces of grinding media. Most often these are half-inch alumina cylinders. The material to be ground is introduced into the voids between the grinding media. Thus, all the energy from the vibrating motor is imparted directly to the grinding media without the necessity for intermediate gears, drives or clutches.

The top eccentric weight causes a horizontal gyration of the grinding chamber, while the bottom eccentric weight provides a gyrating tilt. This unique motion causes three dimensional, high-frequency vibration.

Cylindrical media gives face, line and point contact for narrower particle size distribution. Ball media gives point contact for breaking up larger particles and for a wider size distributions.

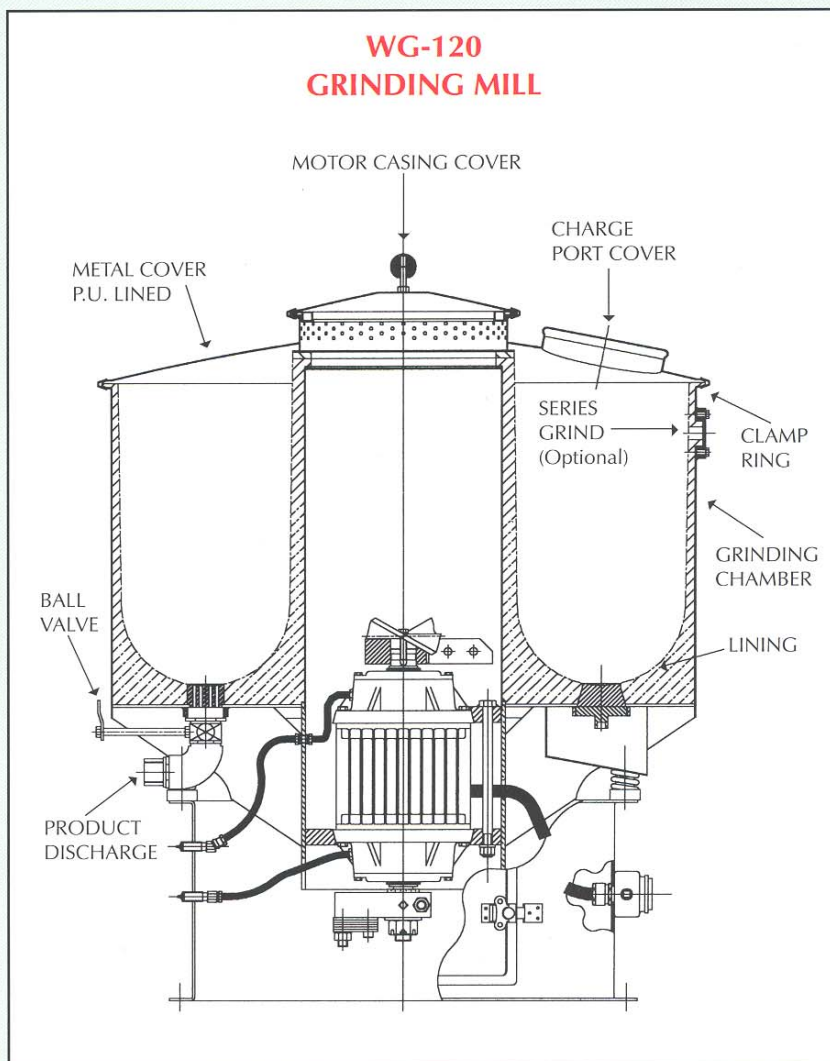

KEY USER ADVANTAGES

Narrow Particle Size Distribution

The ability to control particle size precisely is very important in most industries processing finely ground materials. The Vibratory Mill is unequalled in this important aspect of grinding technology.

Negligible Product Contamination

Ball or pebble mills contaminate through friction and high wear of the media and linings. The Vibratory Mill's high frequency and small impact forces generate low heat build-ups and low media wear.

No Special Installation

Deep, heavy concrete foundations, or specially reinforced structure are not required. The major vibrating forces are directed to the grinding chamber with a minimum of vibration transmitted to the base.

Efficient To Sub-Micron

High frequency and low amplitude is the most efficient way to convert energy to reduce particle size to the sub-micron range.

AMKCO'S LINE OF VIBRATORY GRINDING MILLS



WG-10 Low Amplitude Grinding Mill

Maximum working capacity is 10 litres. Standard base with 10 spring assemblies. Product discharge valve assembly. Metal cover assembly.

Motor: 0.2 Kw

Shipping Wt.: 90 Kg

Media Load: 90 Kg



WG-120 Low Amplitude Grinding Mill

Maximum working capacity is 120 litres. Standard base with 12 spring assemblies. Cover assembly with one charge port. Product discharge assembly with product discharge valve.

Motor: 3.75 Kw

Shipping Wt.: 650 Kg

Media Load: 950 Kg



WG-280 Low Amplitude Grinding Mill

Maximum working capacity is 280 litres. Standard base with 24 spring assemblies. Product discharge and discharge valve assembly. Cover assembly with one charge port.

Motor: 7.5 Kw

Shipping Wt.: 2,500 Kg

Media Load: 2,600 Kg



DG-550 High Amplitude Grinding Mill

Mill can grind wet or dry product. Maximum working capacity is 550 litres. Standard base with 24 spring assemblies. Product discharge and discharge valve assembly. Cover assembly within section and charge port.

Motor: 7.5 Kw

Shipping Wt.: 2,000 Kg

Media Load: 1,000 Kg